



**SCHWING**  
AMERICA INC.


# KVM 52

## Custom carrier mounted concrete pump




Pump Kits on 52	2023-4	2023-5	2023H-6	2525H-5	2525H-6
Theor. Concrete Output (cu./yds/hr)	170	209	182	181	213
Max. Pressure on Concrete (psi)	1007	1007	1233	1169	1169
Max. Strokes/Min.	26	32	28	18	22
Pump Cylinder Diameter (in.)	9	9	9	10	10
Pump Cylinder Stroke Length (in.)	79	79	79	98	98
Differential Cylinder Size (in.)	5.1	5.1	4.7	4.7	4.7
Max. Aggregate Size (in.)	2.5	2.5	2.5	2.5	2.5
Hydraulic System Pressure (psi)	5075	5075	4495	5075	5075

Specifications are subject to change without prior notice

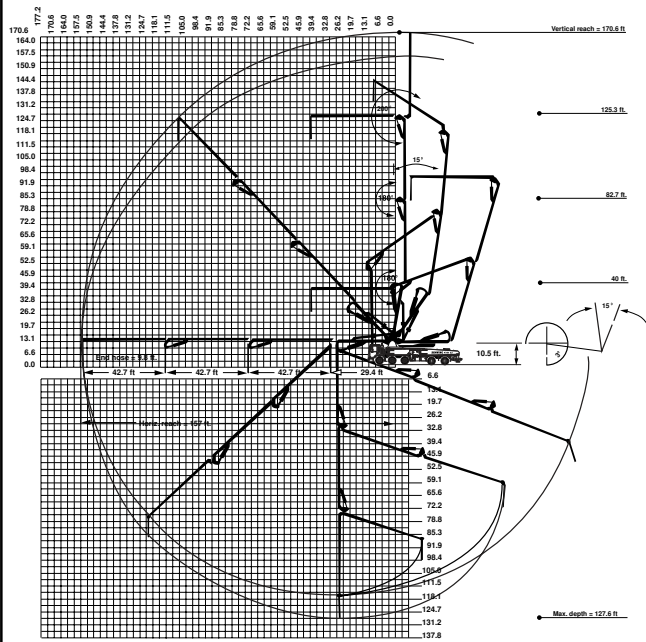

Boom Specifications	U.S.	Metric
Pipeline Diameter	5"	125 mm
Vertical Reach	170' 7"	52 m
Net Horizontal Reach	157' 6"	48 m
Reach from Slewling Axis	147' 6"	45 m
Section Length	First Section 29' 6"	9 m
	Second Section 42' 8"	13 m
	Third Section 42' 8"	13 m
	Fourth Section 42' 8"	13 m
Slewling Range	360°	360°
End hose length	12.5'	4 m

Specifications are subject to change without prior notice

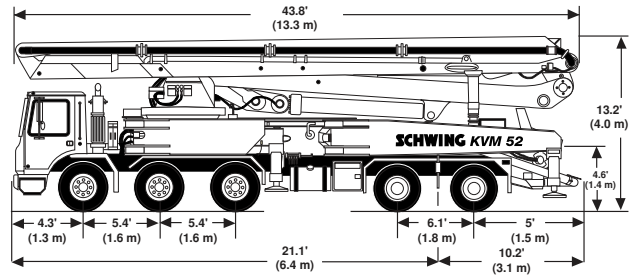

**SCHWING**  
AMERICA INC.

5900 Centerville Road • St. Paul, MN 55127  
Tel 651-429-0999 • FAX 651-429-3464  
www.schwing.com